



STEAM INJECTORS SI

DESCRIPTION

The SI series steam injectors from ADCA are injection condensers. They ensure low noise and vibration and rapid heating of still or flowing fluids in basins and vessels due to direct steam injection. Steam enters through the inlet housing, passes along the center of the heater, through holes in the inner rings, through spaces between the element plates where it condenses under light load and partly condenses under heavy load to be discharged through the serrated periphery of the element plates. Under heavy load if any steam passes through the periphery of the element plates, it will do so in very small jets and will condense in the surrounding liquid with very little noise and vibration. Connections are female screwed.

MAIN FEATURES

Quiet operation.
Corrosion-resistant.
No moving parts.

OPTIONS: Complete system including vacuum breaker and self operated controller.
Different capacities and design available under request.

USE: Direct steam injection heating systems.
See IMI installation and maintenance instructions.

AVAILABLE

MODELS: SI-4; SI-5,5; SI-7; SI-8,5

SIZES: 3/4".

CONNECTIONS: Female screwed ISO 7/1 Rp (BS21)



INSTALLATION: Horizontal or vertical installation.

LIMITING

CONDITIONS: PMO: Max. operating pressure 8,5 bar
TMO: Max. operating temperature 180°C

How to order: i.e. SI-4 DN 3/4" BSP

The pressure rating is stamped on the inlet housing(1). The SI injector is made in one size and if one device does not pass sufficient steam, two or more should be fitted to a common supply pipe.

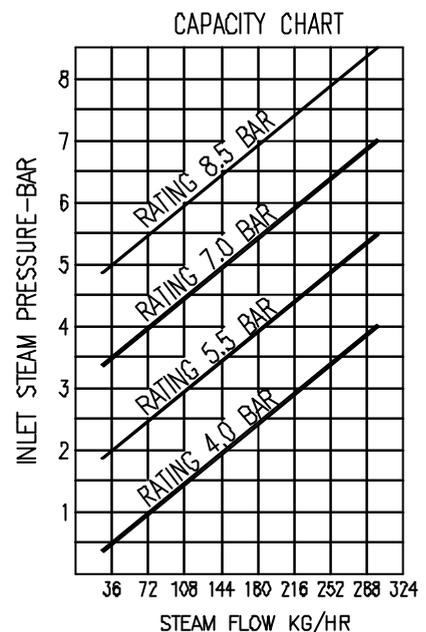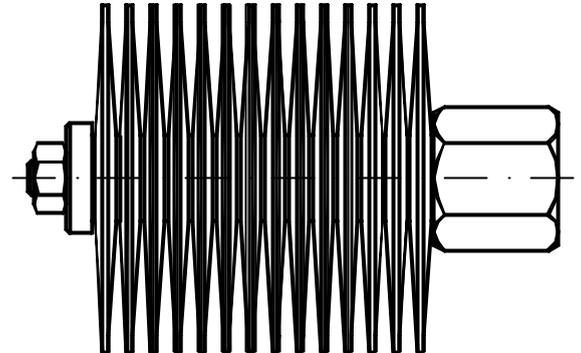

Example : We require to inject 950 Kg/hr of steam with a pressure of 5 bar. Assuming 20% pressure drop across the control valve, therefore the steam supply to the injectors will be 4 bar. From the injector capacity chart we see that the 4 bar injector will pass 293 Kg/hr and 950 divided by 293=3,24. Three injectors of this size will barely cope, so we recommend installing four injectors, which will meet the demand.

MATERIALS

| POS. NR. | DESIGNATION | MATERIAL |
|----------|-----------------|----------|
| 1 | INLET HOUSING | AISI304 |
| 2 | CROSS PIN | AISI304 |
| 3 | TIE-ROD | AISI304 |
| 4 | INNER RINGS | AISI304 |
| 5 | ELEMENT PLATES | AISI304 |
| 6 | RETAINING PLATE | AISI304 |
| 7 | RETAINING NUT | AISI304 |

